


Fig No:

PB-2430

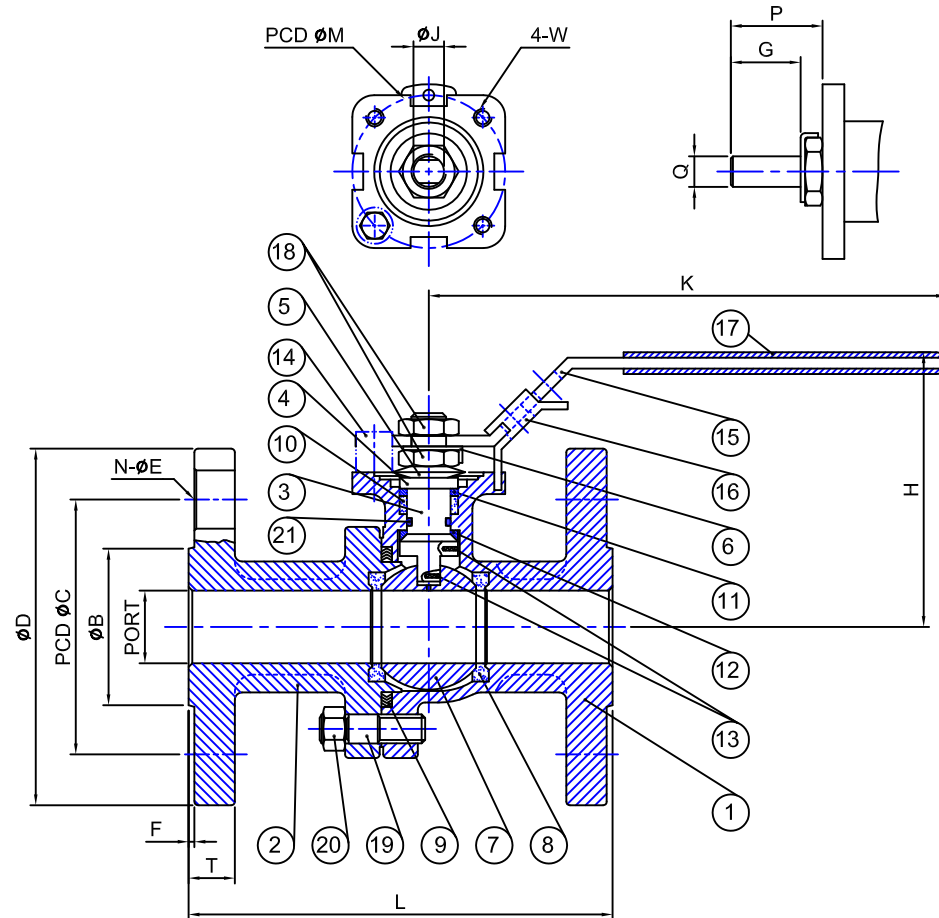

MATERIAL LIST

NO.	PART NAME	MATERIAL		Q'TY
		STAINLESS STEEL	CARBON STEEL	
1	BODY	A351-CF8M	A216-WCB	1
2	CAP	A351-CF8M	A216-WCB	1
3	STEM	SS316		1
4	SLEEVE	SS304		1
5	DISK SPRING WASHER	SS301		2
6	LOCK WASHER	SS304		1
7	BALL	A351-CF8M		1
8	SEAT	RPTFE / PTFE		2
9	GASKET	SPIRAL WOUND WIRE (316/GRAPHITE)		1
10	PACKING(1)	RPTFE / GRAPHITE		1
11	PACKING(2)	50% PTFE + 50% 316		1
12	THRUST WASHER	TFM+ 25% CARBON		1
13	ANTI-STATIC	SS316		2
14	SET SLEEVE	SS304		1
15	HANDLE	SS304		1
16	LOCATING LOCK	SS304		1
17	PLASTIC COVER	PLASTIC		1
18	THIN NUT	SS304		2
19	STUD	B8	B7	4
20	NUT	8	2H	4
21	O-RING	VITON		1

DIMENSIONS

SIZE	PORT	B	C	D	T	F	N	E	H	K	L	J	Q	G	P	M	W	CV	Torque (kgf-cm)	Weight (kgs)
1/2"	15	35	66.5	95	14.3	1.6	4	16	66	165	140	9.3	6.35	8	14	42	M5X0.8	15	110	2.42
3/4"	20	43	82.5	117	15.9	1.6	4	19	74	165	152	9.3	6.35	8	14	42	M5X0.8	40	120	3.24
1"	25	51	89	124	17.5	1.6	4	19	87	200	165	10.9	8	11	19	50	M6X1.0	70	140	4.48
1-1/4"	32	64	98.5	133	19.1	1.6	4	19	92	200	178	10.9	8	11	19	50	M6X1.0	120	350	5.72
1-1/2"	38	73	114.5	156	20.7	1.6	4	22	105	250	190	15.7	9.5	14	23	70	M8X1.25	230	550	8.65
2"	50	92	127	165	22.3	1.6	8	19	115	265	216	15.7	9.5	14	23	70	M8X1.25	390	650	11.06

unit:mm

Pressure VS. Temperature Chart

